

LFN

SHENZHEN LFN TECHNOLOGY CO.,LTD

Infrared Receiver Module



PRODUCTS SPECIFICATION

Model: 1838T

<http://WWW.LFN.CC>

T: 0755-27661476 27661675 27864045



Model:1838T

1. Specification:


- Small design;
- Built-in chip;
- Wide-angle and long distance reception;
- With strong anti-jamming capability;
- Anti-jamming from the light;
- Low votage working;

2. Application:

- AV equipment(speaker,TV,projector,DVD player,VCD player.DVB player)
- Home appliances (fan, air-condition,light)
- Other remote control appliances;




3. Size:

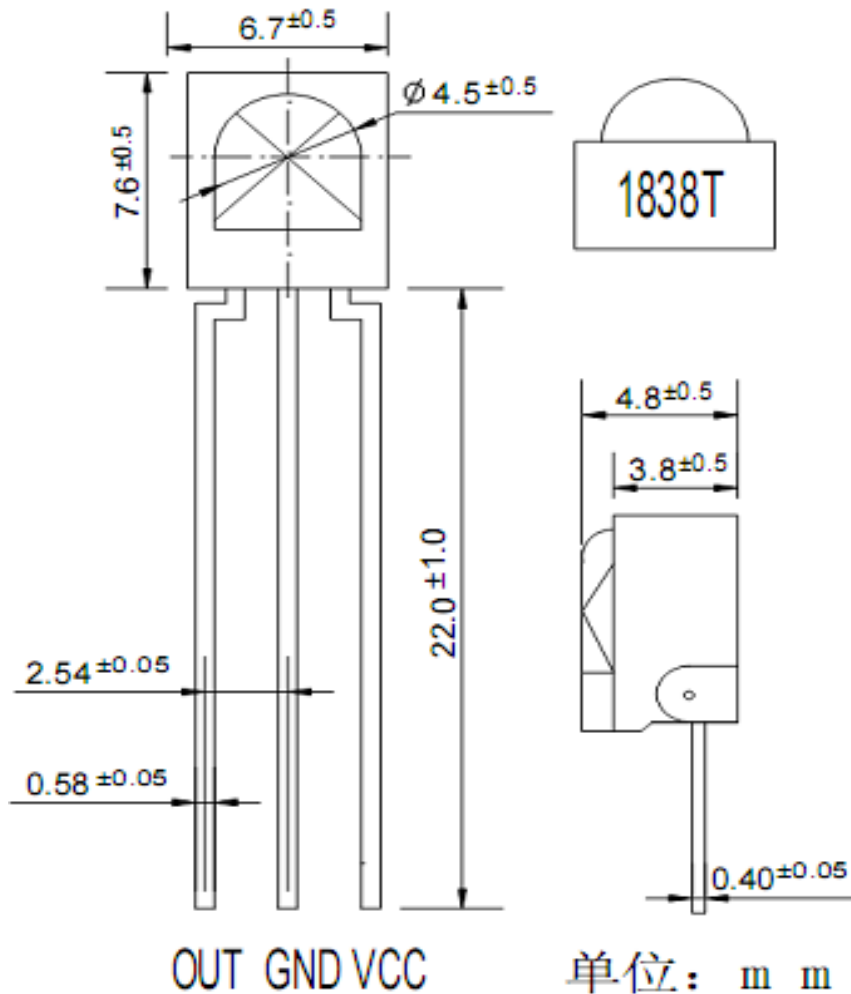


Model: 1838T

4. Application Circuit:

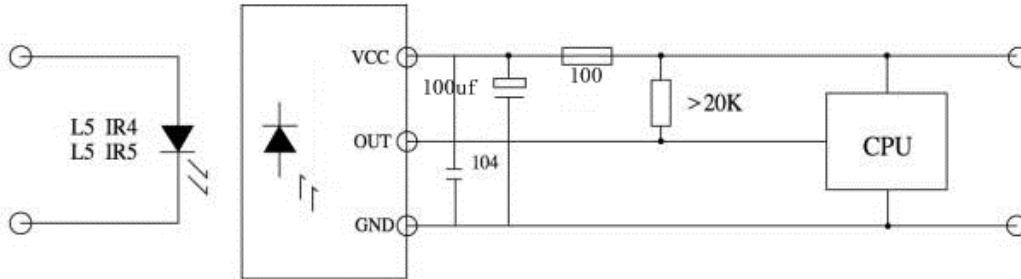

5. Schematic:

Block Diagram

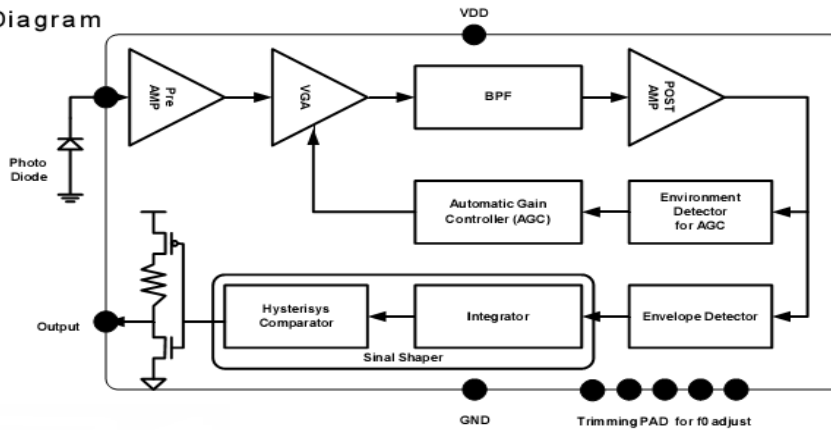

6. Optical parameters (T=25°C Vcc=5v f₀=36.7/38KHZ):

Parameters	Mark	Test condition	Min	Type	Max	Unit
Working vottage	V _{CC}		2.7		5.5	V
Working Current	I _{CC}		0.6	0.8	-	mA
Quiescent current	I _{CE}	With out signal	0.1		0.5	mA
Receive distance	L	※	20	23		M
Receive angle	θ1/2		+/-60			Deg
Carrier frequency	f ₀		36.7/38			KHZ
BMP width	f _{BW}	-3Db Bandwidth	-	8	-	kHz
Low output	V _{OL}	V _{in} =0V V _{cc} =5V			0.4	V
High output	V _{OH}	V _{cc} =5V	V _{cc} -0.3		V _{cc}	V
Output pulse Width	T _{PWL}	V _{in} =50mVp-p	500	600	700	µS
	T _{PWH}	V _{in} =50mVp-p	540	640	740	µS

Model: 1838T

7. TEST WAVE:

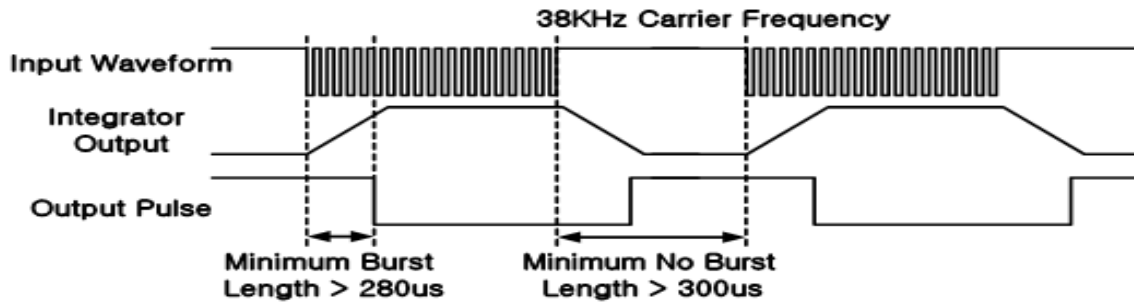


Figure 1 Minimum burst length & No burst length


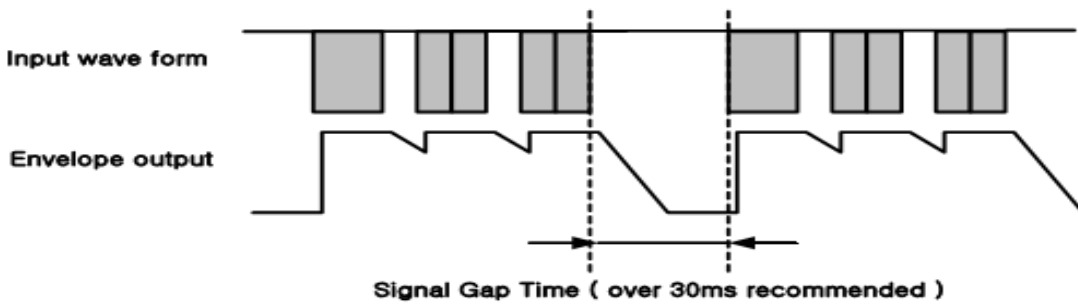


Figure 2 Recommended repeated code format

8. Characteristics Curve ($T_{amb}=25^{\circ}C$ unless otherwise specified):


Note 1:

Input burst wave form

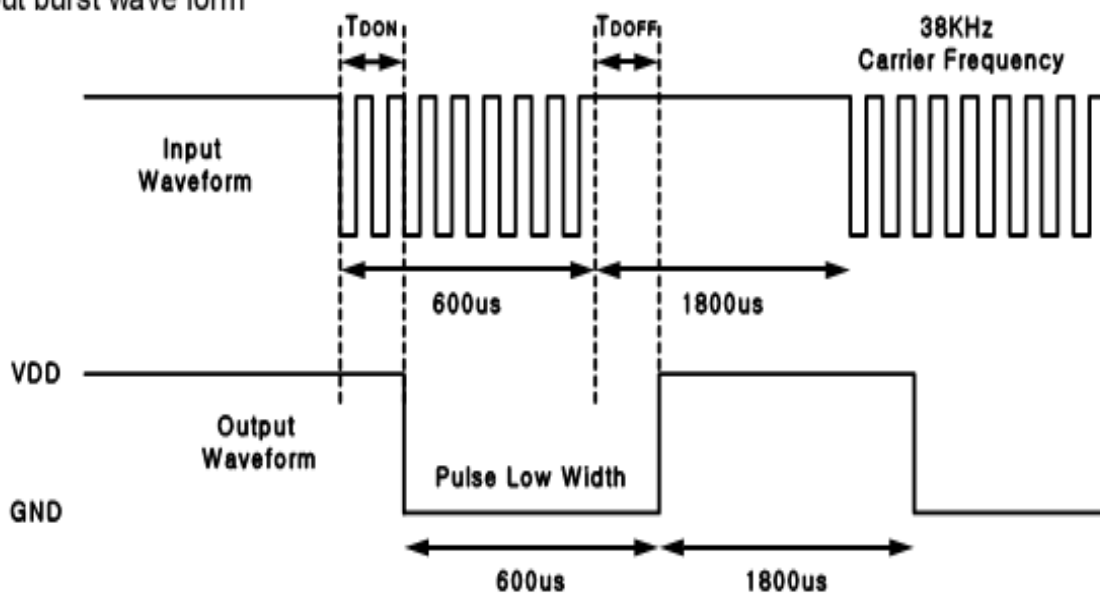


Model: 1838T


Typical Electrical Curves at Temp=25°C

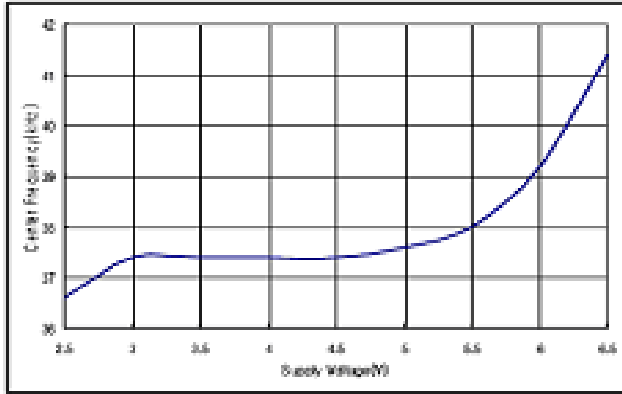


Center Frequency vs supply voltage

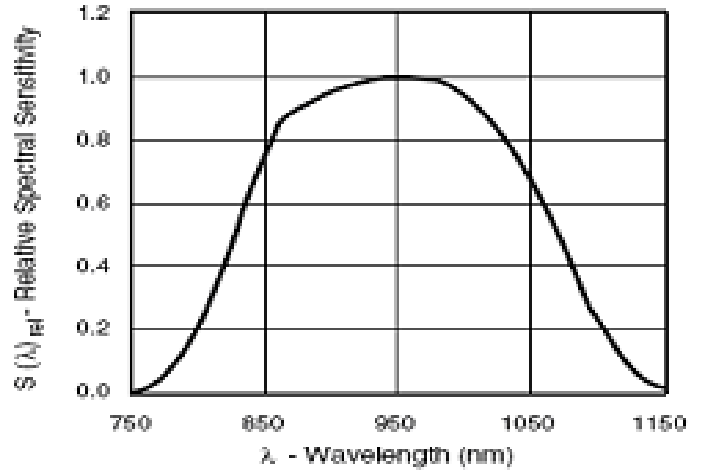


Relative Spectral Sensitivity vs. Wavelength

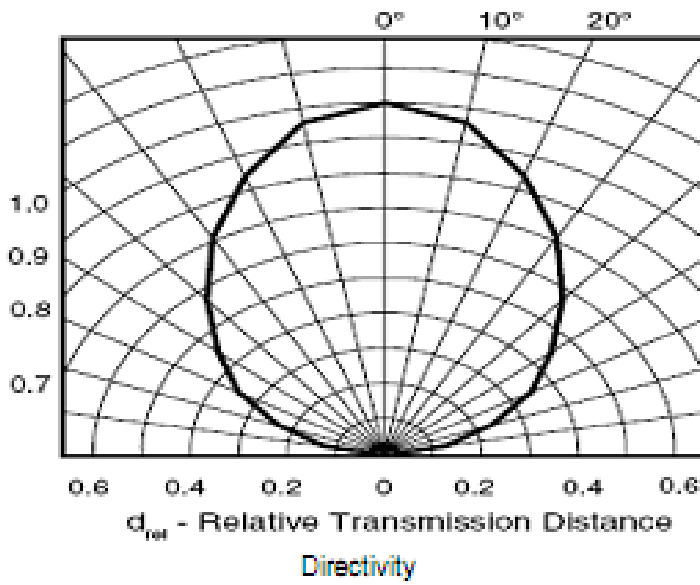

Directivity

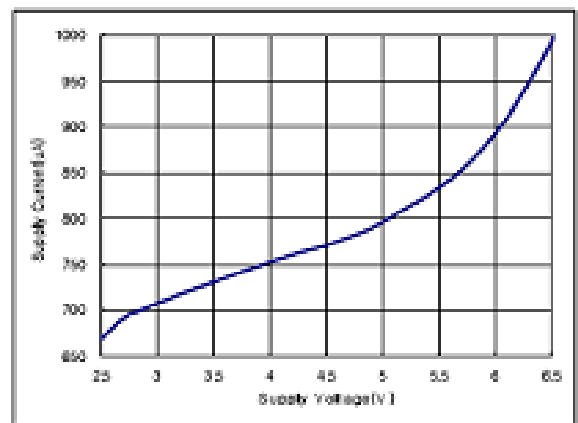

Supply current vs supply voltage

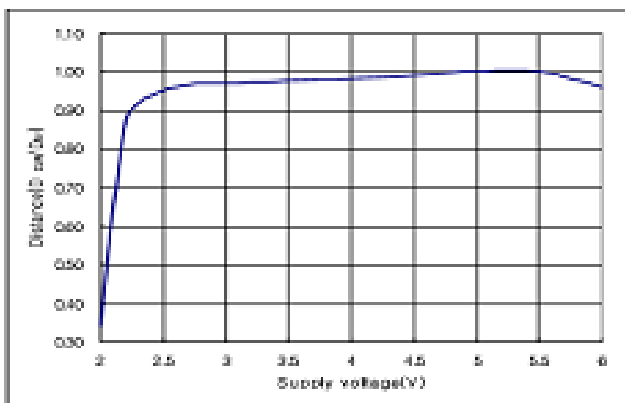

Supply current vs supply voltage

Model: 1838T


9. Max parameters:

Items	Mark	Spec	Unit
Voltage	Vcc	-0.3—6.5	V
temperature	Topr	-25— +85	°C
Stock temp.	Tstg	-40 — +125	°C
Soldering temp.	Tsol	260 (5S)	°C

10. Best condition:

Item	Mark	Min	Typ	Mnx	Unit
Working voltage	Vcc	2.7	-----	5.5	V
Input frequency	FM		36.7/38		KHz
Working Temp.	Topr	-20	25	80	°C

11. Receive Angle:

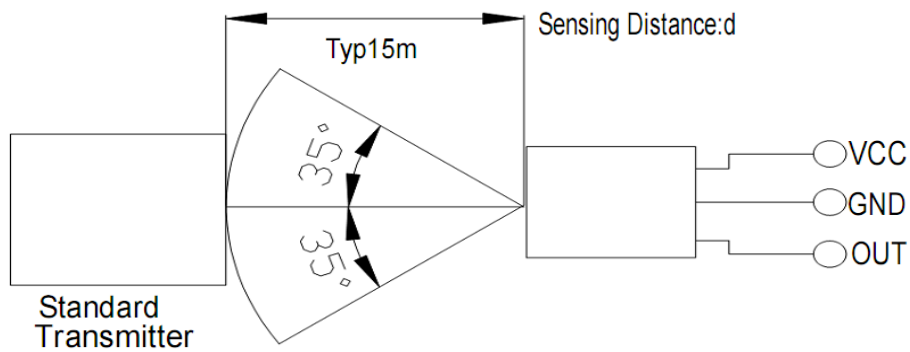

12. Use Note

1. Without any external pressure and influence the quality of the environment, storage and use
2. Stored and used in the non-polluting gas
3. Use in low humidity environment
4. Soldering in stand condition
5. Do not clean the product used water, Please connect the anti-static wire to the electric iron